

CONFEZIONATRICE VERTICALE MODELLO VS-600

vertical packaging machine
MODEL VS-600



La confezionatrice VS-600 è una macchina automatica a movimento intermittente per la confezione a cuscino di prodotti sfusi in genere. Disponibile con vari sistemi di dosatura: con pesatura a canali vibranti o tappeti; con dosatori volumetrici; con dosatori a coclea per prodotti polverosi; con nastro di caricoprodotto. A richiesta possono essere sviluppate linee di confezionamento complete.

Intermittently moving vertical packaging machine for the pillow pack of bulk products typically with material films heat-sealed taken from coil. Available with various dosing systems: with channel weighing vibrating or carpeting; volumetric dosing machines; with screw dosing for powdered products; with product loading belt. On request, all kinds of packaging lines and automations can be developed, complete plants with conveyor belts, hot printer applications, for a complete and functional packaging line.

OCMA PACKAGING SRL

www.ocmapackaging.it

Via Dei Tretti, 43 36014 Santorso (VI) - Italy

Tel. 0445 1947773 / E-mail : info@ocmapackaging.it

CONFEZIONATRICE VERTICALE MODELLO VS-600

vertical packaging machine
MODEL VS-600




Caratteristiche principali:

- Funzionamento pneumatico
- Touch-screen interfaccia operatore
- Prodotti da confezionare:
formaggi, mozzarelle, frutta secca, biscotti,
prodotti surgelati, caffè, riso, zucchero
sale, minuterie metalliche in genere, ecc
- Larghezza max bobina 600mm
- Velocità max 50 confezioni/min
- Potenza installata 2500 watt
- Touch-screen interfaccia operatore a colori
- Alimentazione elettrica 400volts-50HZ-3Ph+N
- Funzionamento con PLC

Optionals:

- Fotocellula per stampa centrata
- Stampante a caldo
- Immisione liquidi di governo
- Immisione gas inerte
- Dosatori

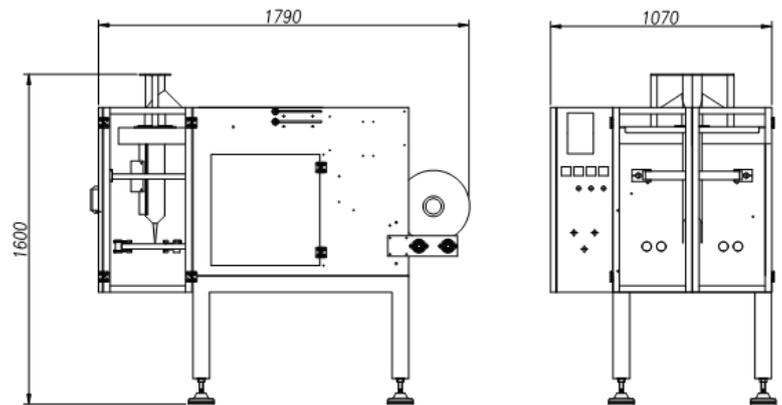

Technical features:

- Pneumatic function
- Touch-screen operator interface
- Products to be packaged interface:
*cheeses, mozzarella, dried fruits, biscuits,
frozen foods, coffee, rice, sugar, salt,
small metal parts in general, ecc*
- Installed power 2500 watts
- Electrical Power supply 400volts-50Hz-3Ph+N
- Functional with PLC

Optionals:

- Photocell for centered printing
- Hot Printer
- Liquid input government
- Inerte gas input
- Dosers

OCMA PACKAGING SRL

www.ocmapackaging.it

Via Dei Tretti, 43 36014 Santorso (VI) - Italy

Tel. 0445 1947773 / E-mail : info@ocmapackaging.it